

HD240 SERIES

AC-DC ITE SWITCHING PSU - 240 WATT



KEY FEATURES

Digital Power's HD240 Series are switching power supplies that produce superior output wattages with natural convection. The series include enclosed, open frame and U bracket format with output voltage options of 12V, 24V and 48V. Featured with compact, low profile footprint, and best-in-class performance, HD240 Series are optimal for broad Industrial and Telecommunication Applications.

Designed with energy saving in mind, Digital Power's HD240 Series boasts not only high operating efficiency up to 94%, but also high-power density with full input range of 90-264Vac and built-in active PFC.

HD240 Series operates over wide temperature range from -30°C to +80°C with complete protections; EMI configured for both Class I and Class II and certified to UL / IEC / EN 62368-1.

PRODUCT SPECIFICATION

Enclosed, Open Frame, U Bracket Switching Power Supply

- Universal Input Range 90-264VDC
- High Efficiency up to 94%
- O/P Voltage: 12,24,48VAC
- No Load Power Consumption<0.5W
- -30°C to +80°C Wide Operation Temperature Range
- Built-in 12V / 0.5A Fan Supply(HD240O)
- Operating Altitude 5000M
- Active PFC Function
- I/O Isolation 4000VAC
- EMI for Both Class I (with PE) and Class II (without PE) Configuration
- UL / IEC / EN 62368-1 Safety Approvals
- Ultra Compact Size:
HD240E/U: 4.1 x 2.46 x 1.54 Inches
HD240O: 4.02 x 2.05 x 1.09 Inches

ELECTRICAL SPECIFICATION - HD240O SERIES


Model No.		HD240O-112	HD240O-124	HD240O-148
Max Output Wattage (with 8CFM FAN) (W)		240 W		
Max Output Wattage (Conduction Cooling) (W) (Note 12)		180 W		
Max Output Wattage (Natural Convection) (W)		160 W		
Input	Voltage (Note 4)	90-264 VAC		
	Frequency (Hz)	47-63 Hz		
	Current (Full load)	< 3.0 A max. (115 VAC) / < 1.5 A max. (230 VAC)		
	Inrush Current (<2ms)	< 45 A max. (115 VAC) / < 90 A max. (230 VAC)		
	Power Factor	PF>0.9 at Full Load		
	No Load	< 0.5W (115 / 230 VAC)		
Output	Voltage (V.DC.)	12V	24V	48V
	Voltage Adj Range (V.DC.)	±5% Output Voltage		
	Voltage Accuracy	±2%		
	Current (with 8CFM FAN) (A) (max.)	20	10	5
	Current (Conduction Cooling) (A) (max.)	15	7.5	3.75
	Current (Natural Convection) (A) (max.)	13.33	6.66	3.33
	Line Regulation	±1%		
	Load Regulation (0-100%)	±1%		
	Minimum Load	0%		
	Maximum Capacitive Load	8000μF	3000μF	470μF
	Ripple & Noise (max.) (Note 1)	1% Vout		
	Efficiency (at 230VAC) (Note 6)	92.5%	93%	94%
Protection	Hold-up Time (at 115 VAC) (Note 2)	10 ms min.		
	Over Power Protection	Auto recovery, Hiccup mode		
	Over Voltage Protection	Auto recovery		
	Overt Temperature Protection	Auto recovery		
	Short Circuit Protection	Protection level 1 (nominal) : Continuous, Auto recovery Protection level 2 (instantaneous high current) : Latch		
Isolation	Input-Output (Note 5)	4000VAC or 5656VDC		
	Input-PE (Note 5)	2000VAC or 2828VDC		
	Output-PE (Note 5)	1500VAC or 2121VDC		
Environment	Operating Temperature	-30°C...+80°C (with derating)		
	Storage Temperature	-30°C...+80°C		
	Temperature Coefficient	±0.05%/°C		
	Altitude During Operation	5000m		
	Humidity	20~90% RH		
	MTBF	>250,000 h @ 25°C (MIL-HDBK-217F, Notice 1)		
	Vibration	IEC60068-2-6 (10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)		
	Shock	IEC60068-2-27		
Physical	Dimensions (L x W x H)	4.02 x 2.05 x 1.09 Inches (101.9 x 52.1 x 27.6 mm) Tolerance 0.5 mm		
	Weight	220 g		
	Cooling Method	Natural Convection / Conduction Cooling / 8CFM FAN		
Safety	Approval	UL 60950 UL / IEC / EN 62368		
EMC	Conducted EMI (Note 6)	EN55032 Class B		
	Radiated EMI (Note 6)	EN55032 Class I Class B / Class II Class A		
	EMS	EN55035		

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

ELECTRICAL SPECIFICATION - HD2400 SERIES

NOTE

1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. Hold-up Time measured at 90% Vout.
3. Fan Supply=12V/0.5A (max) for driving a fan..
4. Please check the derating curve for more details.
5. Strongly recommend to conduct this test with DC Voltage. If customer wishes to test with AC Voltage, please disconnect all Y-Capacitors from Digital Power power supply.
6. Vin at 230 VAC & 48 Vout

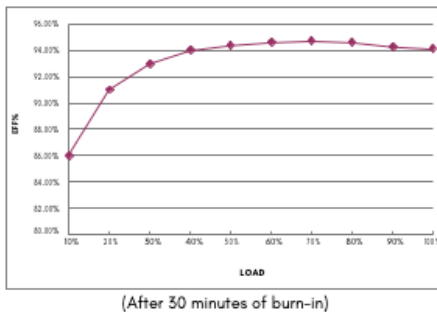


7. The FAN supply is designed to serve as the source of the additive external fan for the cooling of the power supply, enabling the full load delivery and assuring the best life span of the product. Please do not use this FAN supply to drive other devices.

For 112, 124, 148			
Main Output Power	FAN Voltage (at 0.1A)	FAN Voltage (at 0.25A)	FAN Voltage (at 0.5A)
25%	12.1V	11.8V	11.5V
50%	12.2V	11.9V	11.7V
75%	12.3V	12.0V	11.8V
100%	12.5V	12.2V	11.9V



8. Please secure the power supply unit to your metal case by using the four screw holes in the corners for either Class I or Class II equipment.
9. The ambient temperature derating of 3.5 /1000m with fanless models and of 5 /1000m with fan models for operating altitude higher than 2000m(6500ft).
10. At least 15mm insulation distance on the bottom of the unit should be kept and a Mylar film should be added between the unit and the system.
11. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing.

NOTE

12.

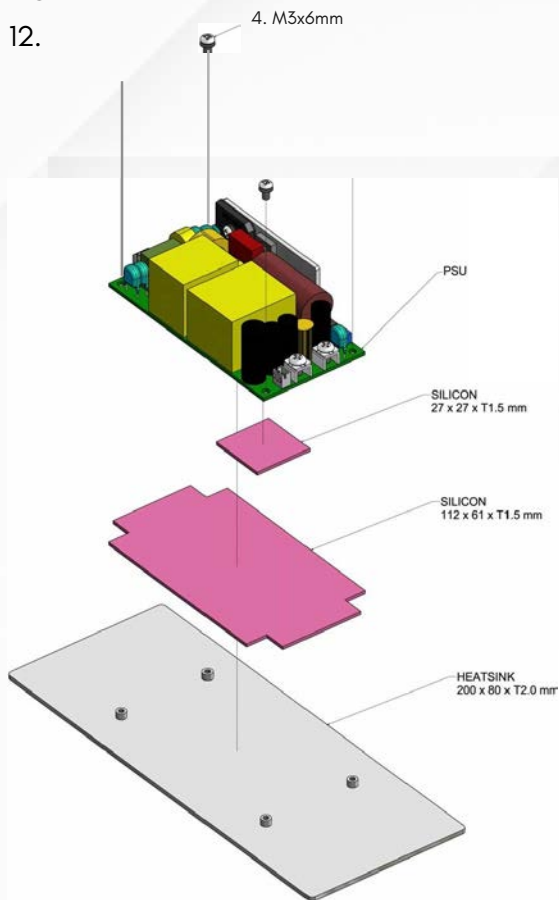


DERATING

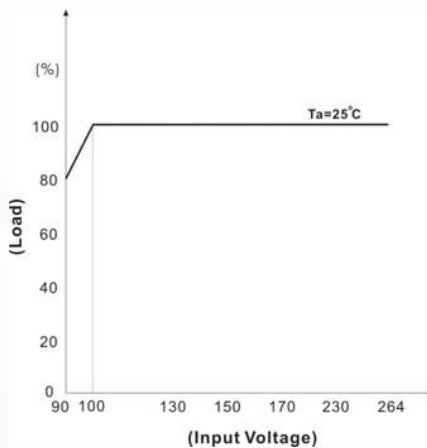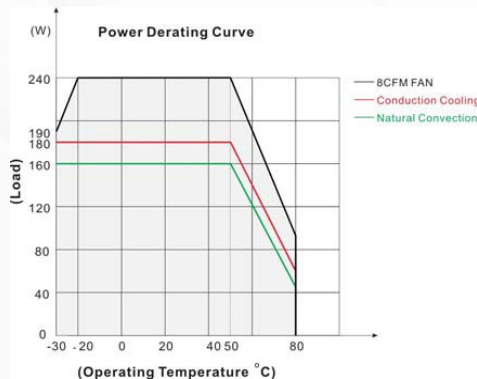

MECHANICAL DIMENSIONS - HD2400 SERIES

Standard

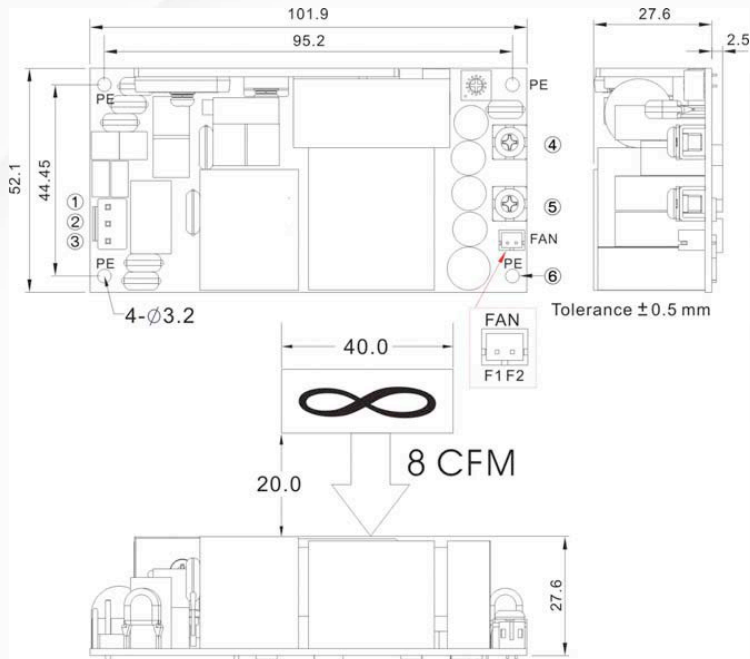

Standard



Please refer to the types of terminal block; the pictures shown are for illustration purpose only, actual product may vary.




Brands		Alex		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
1	AC IN (N)	9396-3	96T series	VHR-3N	SVH-41T-P1.1
2	NO PIN				
3	AC IN (L)				
4	+DC OUT	Terminal : M3.5 Pan HD screw in 2 positions Torque to 8 lbs-in(90 cNm) max.			
5	-DC OUT				
6	PE	—	—	—	—

Connector Pin (FAN)

Brands		Cherng Weei		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
F1	+AUX OUT	CX-H20-02	CP-T20B	PHR-2	SPH-002T-P0.5L
F2	-AUX OUT				

MECHANICAL DIMENSIONS - HD2400 SERIES

A Type

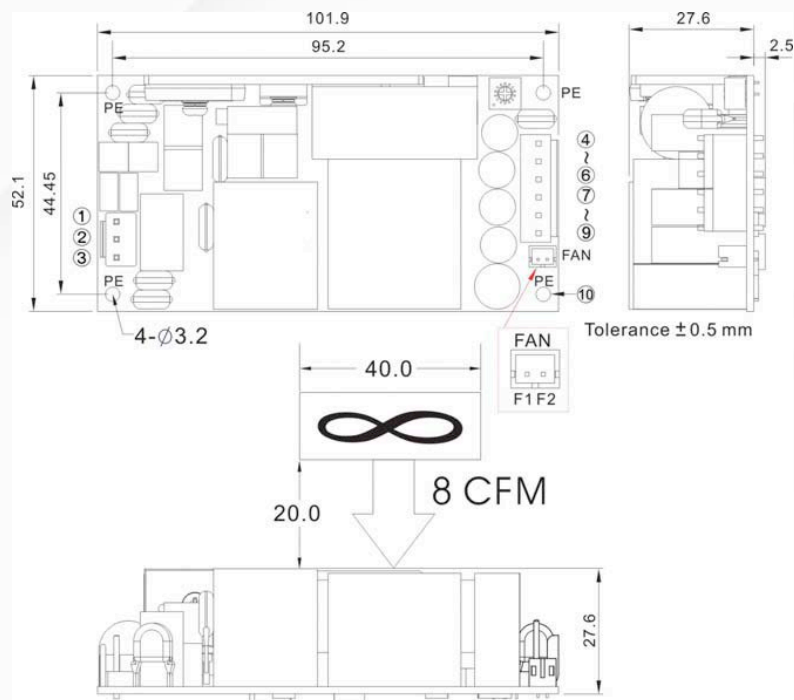

A Type



Please refer to the types of terminal block; the pictures shown are for illustration purpose only, actual product may vary.

Brands		Alex		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
1	AC IN (N)	9396-3	96T series	VHR-3N	SVH-41T-P1.1
2	NO PIN				
3	AC IN (L)				
4~6	+DC OUT	9396-6	96T series	VHR-6N	SVH-41T-P1.1
7~9	-DC OUT				
10	PE	—	—	—	—

Connector Pin (FAN)

Brands		Cherng Weei		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
F1	+AUX OUT	CX-H20-02	CP-T20B	PHR-2	SPH-002T-P0.5L
F2	-AUX OUT				

ELECTRICAL SPECIFICATION - HD240U SERIES


Model No.			HD240U-112	HD240U-124	HD240U-148
Max Output Wattage (with 8CFM FAN) (W)			240 W		
Max Output Wattage (Conduction Cooling) (W)(Note 6)			240 W		
Max Output Wattage (Natural Convection) (W)			210 W (100 VAC) / 234 W (230 VAC)		215 W (100 VAC) / 240 W (230 VAC)
Input	Voltage(Note 3)		90-264 VAC		
	Frequency (Hz)		47-63 Hz		
	Current (Full load)		< 3.0 A max. (115 VAC) / < 1.5 A max. (230 VAC)		
	Inrush Current (<2ms)		< 45 A max. (115 VAC) / < 90 A max. (230 VAC)		
	Power Factor		PF>0.9 at Full Load		
	No Load		< 0.5W (115 / 230 VAC)		
Output	Voltage (V.DC.)		12V	24V	48V
	Voltage Adj Range (V.DC.)		±5% Output Voltage		
	Voltage Accuracy		±2%		
	Current (with 8CFM FAN) (A) (max.)		20	10	5
	Current (Conduction Cooling) (A) (max.)		20	10	5
	Current (Natural Convection) (A) (max.)	at 100 VAC	17.5	8.96	4.48
		at 230 VAC	19.5	10	5
	Line Regulation		±1%		
	Load Regulation (0-100%)		±1%		
	Minimum Load		0%		
	Maximum Capacitive Load		8000μF	3000μF	470μF
	Ripple & Noise (max.)(Note 1)		1% Vout		
	Efficiency (at 230VAC)(Note 5)		92.5%	93%	94%
	Hold-up Time (at 115 VAC)(Note 2)		10 ms min.		
Protection	Over Power Protection		Auto recovery, Hiccup mode		
	Over Voltage Protection		Auto recovery		
	Over Temperature Protection		Auto recovery		
	Short Circuit Protection		Protection level 1 (nominal) : Continuous, Auto recovery Protection level 2 (instantaneous high current) : Latch		
Isolation	Input-Output(Note 4)		4000VAC or 5656VDC		
	Input-PE(Note 4)		2000VAC or 2828VDC		
	Output-PE(Note 4)		1500VAC or 2121VDC		
Environment	Operating Temperature		-30°C...+80°C (with derating)		
	Storage Temperature		-30°C...+80°C		
	Temperature Coefficient		±0.05%/°C		
	Altitude During Operation		5000m		
	Humidity		20~90% RH		
	MTBF		>250,000 h @ 25°C (MIL-HDBK-217F, Notice 1)		
	Vibration		IEC60068-2-6 (10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)		
	Shock		IEC60068-2-27		
Physical	Dimensions (L x W x H)		4.1 x 2.46 x 1.54 Inches (104.0 x 62.5 x 39.2 mm) Tolerance ±0.5 mm		
	Weight		350 g		
	Cooling Method		Natural Convection / Conduction Cooling / 8CFM FAN		
Safety	Approval		UL 60950 UL / IEC / EN 62368		
EMC	Conducted EMI(Note 7)		EN55032 Class B		
	Radiated EMI(Note 7)		EN55032 Class I Class B / Class II Class A		
	EMS		EN55035		

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.


ELECTRICAL SPECIFICATION - HD240U SERIES

NOTE

1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. Hold-up Time measured at 90% Vout.
3. Please check the derating curve for more details.
4. Strongly recommend to conduct this test with DC Voltage. If customer wishes to test with AC Voltage, please disconnect all Y-Capacitors from Digital Power power supply.
5. Vin at 230 VAC & 48 Vout



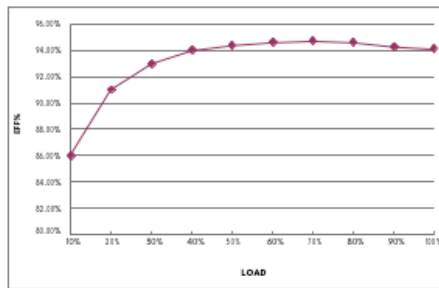


(After 30 minutes of burn-in)

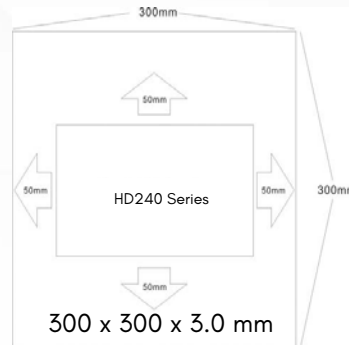

6. The size of the suggested aluminum plate is shown as below. And for optimizing thermal performance, the aluminum plate must have an even and smooth surface (or coated with thermal grease), and HD240 series must be firmly mounted at the center of the aluminum plate.
7. Please secure the power supply unit to your metal case by using the four screw holes in the corners for either Class I or Class II equipment
8. The ambient temperature derating of 3.5 /1000m with fanless models and of 5 /1000m with fan models for operating altitude higher than 2000m(6500ft).
9. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing.


DERATING

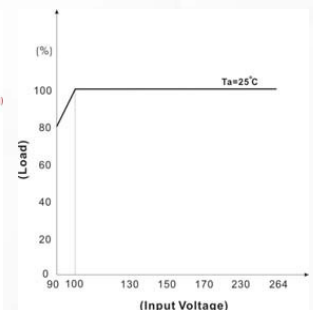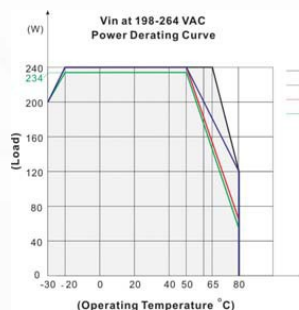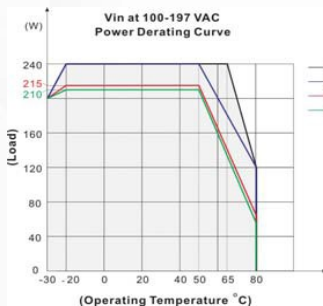

If input voltage is lower than 100VAC, please refer to the output derating V.S. input voltage curve for details


MECHANICAL DIMENSIONS - HD240U SERIES

Standard

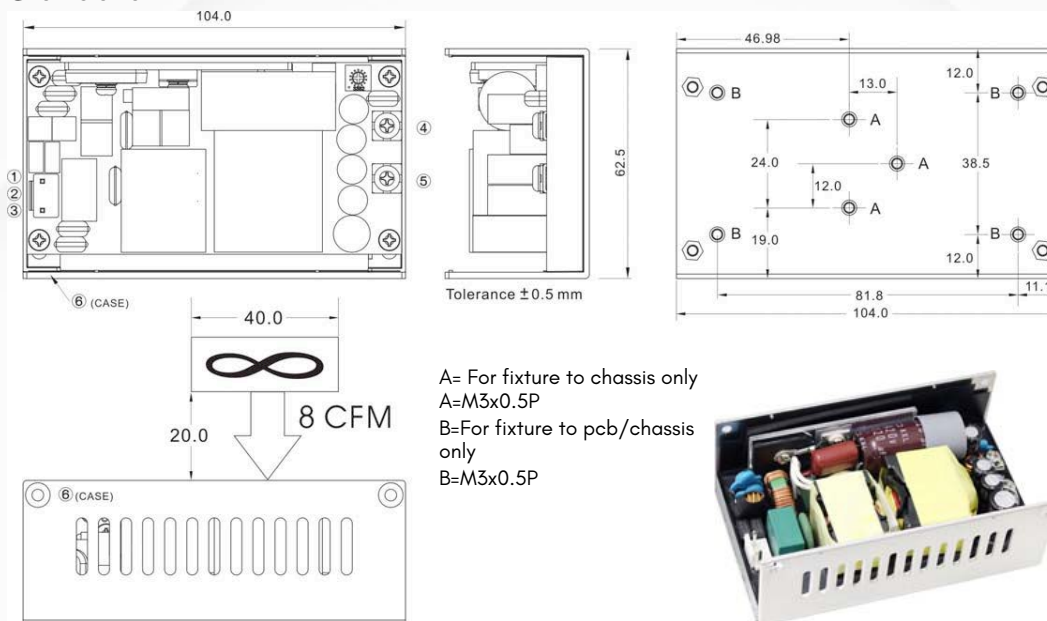

Brands		Alex		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
1	AC IN (N)	9396-3	96T series	VHR-3N	SVH-4IT-P1.1
2	NO PIN				
3	AC IN (L)				
4	+DC OUT	Terminal : M3.5 Pan HD screw in 2 positions Torque to 8 lbs-in(90 cNm) max.			
5	-DC OUT				
6	PE	—	—	—	—


Standard

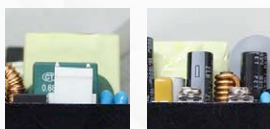


Please refer to the types of terminal block; the pictures shown are for illustration purpose only, actual product may vary.

ASSEMBLY INSTRUCTIONS
U Case T=1.5mm
Customer is advised to screw into the threads no more than 1.5mm


Chassis of
HD240U
Series

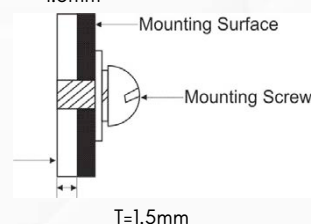

A Type

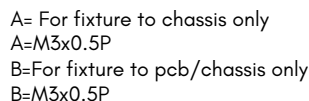


A Type

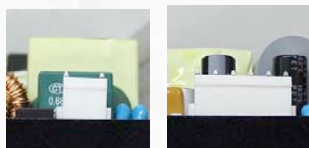

Please refer to the types of terminal block; the pictures shown are for illustration purpose only, actual product may vary.

Customer is advised to screw into the threads no more than 1.5mm

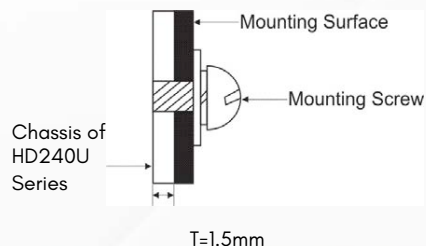

ELECTRICAL SPECIFICATION - HD240E SERIES


Model No.			HD240E-112	HD240E-124	HD240E-148
Max Output Wattage (with 8CFM FAN) (W)			240 W		
Max Output Wattage (Conduction Cooling) (W) (Note 6)			240 W		
Max Output Wattage (Natural Convection) (W)			210 W (100 VAC) / 234 W (230 VAC)		215 W (100 VAC) / 240 W (230 VAC)
Input	Voltage(Note 3)		90-264 VAC		
	Frequency(Hz)		47-63 Hz		
	Current (Full load)		< 3.0 A max. (115 VAC) / < 1.5 A max. (230 VAC)		
	Inrush Current (<2ms)		< 45 A max. (115 VAC) / < 90 A max. (230 VAC)		
	Power Factor		PF>0.9 at Full Load		
	No Load		< 0.5W (115 / 230 VAC)		
Output	Voltage (V.DC.)		12V	24V	48V
	Voltage Adj Range (V.DC.)		±5% Output Voltage		
	Voltage Accuracy		±2%		
	Current (with 8CFM FAN) (A) (max.)		20	10	5
	Current (Conduction Cooling) (A) (max.)		20	10	5
	Current (Natural Convection) (A) (max.)	at 100 VAC	17.5	8.96	4.48
		at 230 VAC	19.5	10	5
	Line Regulation		±1%		
	Load Regulation (0-100%)		±1%		
	Minimum Load		0%		
	Maximum Capacitive Load		8000μF	3000μF	470μF
	Ripple & Noise (max.) (Note 1)		1% Vout		
	Efficiency (at 230VAC) (Note 5)		92.5%	93%	94%
Hold-up Time (at 115 VAC) (Note 2)		10 ms min.			
Protection	Over Power Protection		Auto recovery, Hiccup mode		
	Over Voltage Protection		Auto recovery		
	Over Temperature Protection		Auto recovery		
	Short Circuit Protection		Protection level 1 (nominal) : Continuous, Auto recovery Protection level 2 (instantaneous high current) : Latch		
Isolation	Input-Output (Note 4)		4000VAC or 5656VDC		
	Input-PE (Note 4)		2000VAC or 2828VDC		
	Output-PE (Note 4)		1500VAC or 2121VDC		
Environment	Operating Temperature		-30°C...+80°C (with derating)		
	Storage Temperature		-30°C...+80°C		
	Temperature Coefficient		±0.05%/°C		
	Altitude During Operation		5000m		
	Humidity		20~90% RH		
	MTBF		>250,000 h @ 25°C (MIL-HDBK-217F, Notice 1)		
	Vibration		IEC60068-2-6(10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)		
Shock		IEC60068-2-27			
Physical	Dimensions (L x W x H)		4.1 x 2.46 x 1.54 Inches (104.0 x 62.5 x 39.2 mm) Tolerance 0.5 mm		
	Weight		365 g		
	Cooling Method		Natural Convection / Conduction Cooling / 8CFM FAN		
Safety	Approval		UL 60950 UL / IEC / EN 62368		
EMC	Conducted EMI (Note 7)		EN55032 Class B		
	Radiated EMI (Note 7)		EN55032 Class I Class B / Class II Class A		
	EMS		EN55035		

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.


ELECTRICAL SPECIFICATION - HD240E SERIES

NOTE

1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. Hold-up Time measured at 90% Vout.
3. Please check the derating curve for more details.
4. Strongly recommend to conduct this test with DC Voltage. If customer wishes to test with AC Voltage, please disconnect all Y-Capacitors from Digital Power power supply.
5. Vin at 230 VAC & 48 Vout



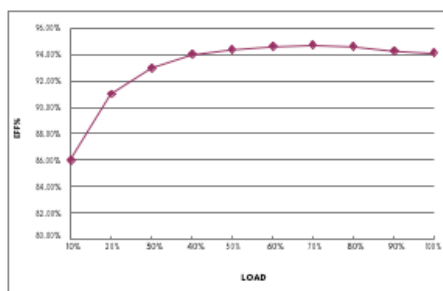


(After 30 minutes of burn-in)

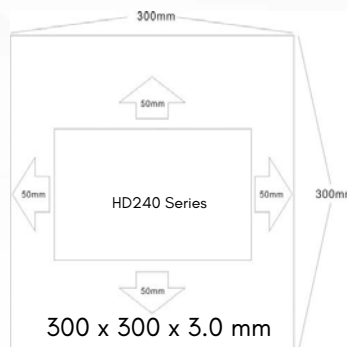

6. The size of the suggested aluminum plate is shown as below. And for optimizing thermal performance, the aluminum plate must have an even and smooth surface (or coated with thermal grease), and HD240 series must be firmly mounted at the center of the aluminum plate.
7. Please secure the power supply unit to your metal case by using the four screw holes in the corners for either Class I or Class II equipment
8. The ambient temperature derating of 3.5 /1000m with fanless models and of 5 /1000m with fan models for operating altitude higher than 2000m(6500ft).
9. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing.


DERATING

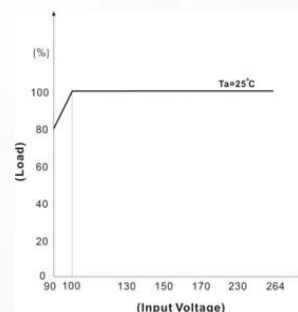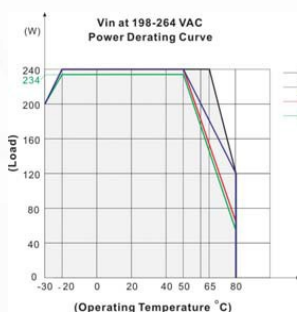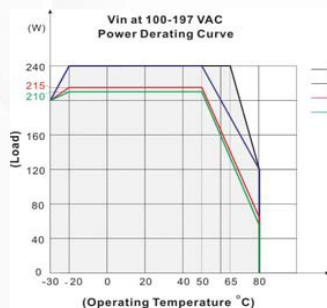

If input voltage is lower than 100VAC, please refer to the output derating V.S. input voltage curve for details

MECHANICAL DIMENSIONS - HD240E SERIES

Standard

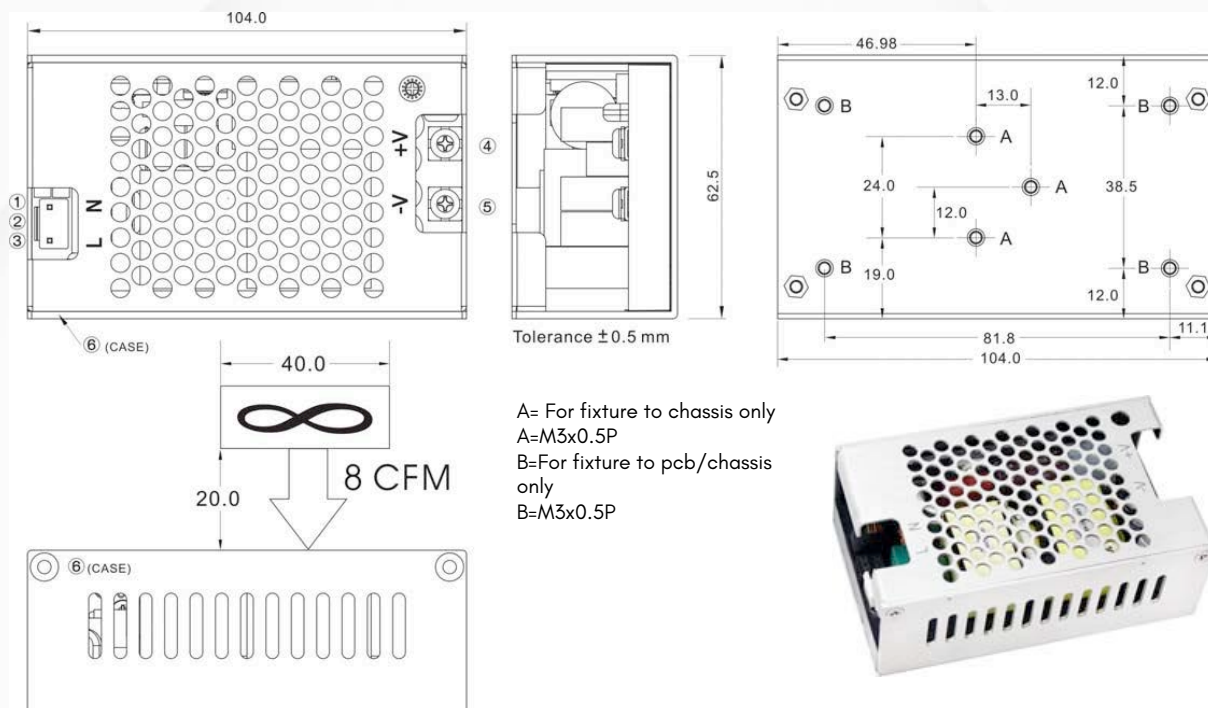


Brands		Alex		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
1	AC IN (N)	9396-3	96T series	VHR-3N	SVH-41T-P1.1
2	NO PIN				
3	AC IN (L)				
4	+DC OUT	Terminal : M3.5 Pan HD screw in 2 positions Torque to 8 lbs-in(90 cNm) max.			
5	-DC OUT				
6	PE	—	—	—	—


ASSEMBLY INSTRUCTIONS

U Case T=1.5mm

Customer is advised to screw into the threads no more than 1.5mm

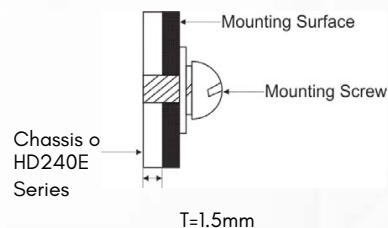


Standard

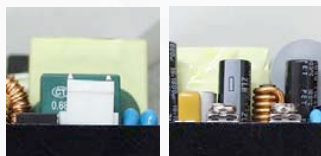

Please refer to the types of terminal block; the pictures shown are for illustration purpose only, actual product may vary.

MECHANICAL DIMENSIONS - HD240E SERIES

A Type

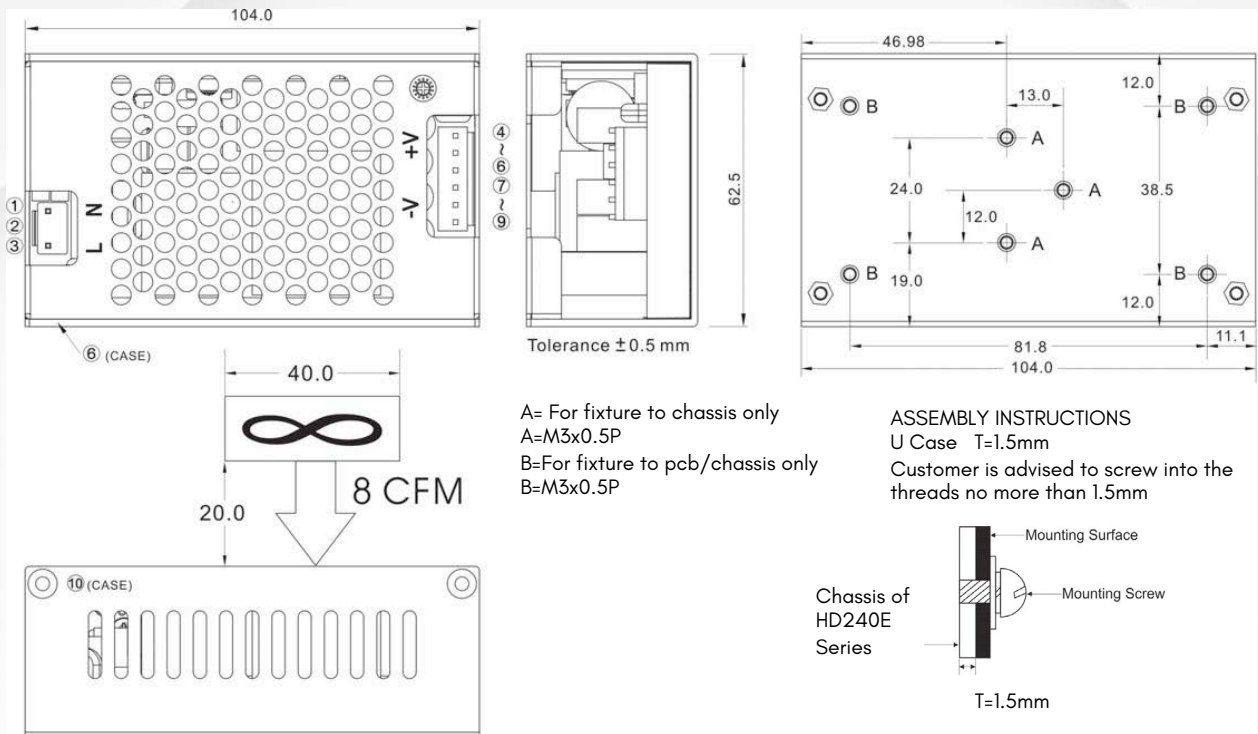

Brands		Alex		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
1	AC IN (N)	9396-3	96T series	VHR-3N	SVH-4IT-P1.1
2	NO PIN				
3	AC IN (L)				
4~6	+DC OUT	9396-6	96T series	VHR-6N	SVH-4IT-P1.1
7~9	-DC OUT				
10	PE	—	—	—	—

A Type



Please refer to the types of terminal block; the pictures shown are for illustration purpose only, actual product may vary.

Digital Power
Flexible Power Solutions
A COOLISYS COMPANY
Technologies Corp.

Digital Power Corporation

1635 S Main Street.
Milpitas, CA 95035 USA

T: (877) 634-0982 sales@digipwr.com
F: (510) 657-6634 www.digipwr.com

Digital Power Corporation designs and manufactures full custom, value added and standard comprehensive power solutions for the most demanding applications in the defense, healthcare, telecom, and industrial markets.